

5700


6600 lm 47 W 840 FO EM 1h 145x1277mm IP66

L2

ARTICLE NO: 15711722000




Dimension




Dimension (mm): L: 1277 W: 145 H: 101

Product description

Installation: Ceiling or suspended (CS) **Nominal luminaire luminous flux:** 6600 lm
Luminaire luminous flux: 6568 lm **Power:** 47 W
Correlated colour temperature - CCT: 4000 K **Colour rendering index - CRI:** 80
Chromaticity tolerance (initial MacAdam): 2 **Lumen maintenance factor:** 50000h
L90 B10 at 25°C **Driver:** LED driver with fixed output **Emergency module:**
Emergency module with 1h autonomy **Power Supply Range:** 230V 50Hz **Material:**
Polycarbonate **Optic material:** Polycarbonate diffuser with internal prismatic structure
IP protection : IP66 **IK protection:** IK07 **EAN No.:** 3831121035773 **Weight:** 2,80 kg
Weight of luminaire with packaging: 3,30 kg

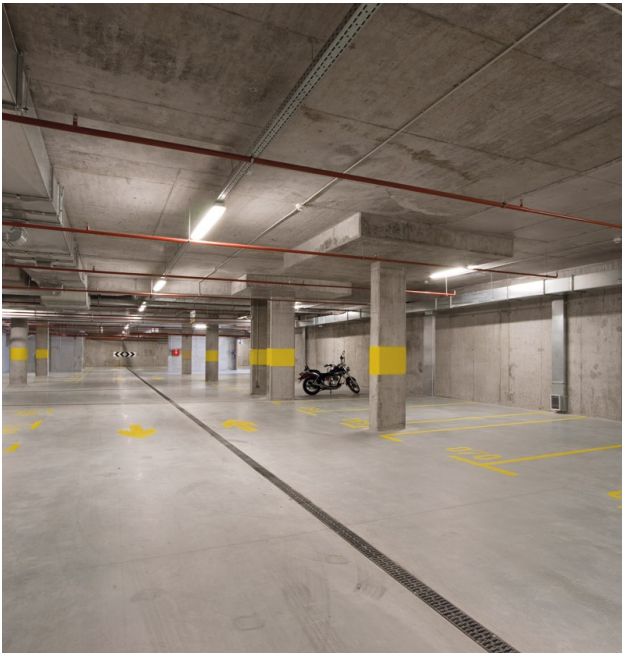

Photometry

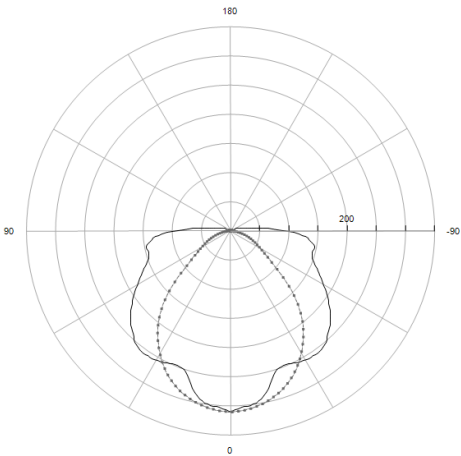

Light output ratio	
LOR	100
ULOR	5,9
DLOR	94,1
Luminaire efficacy (LEF)	139
UGR values	
X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	27.4
Longitudinal	20.9
Classification	
BZ	BZ 5 / 1.5 / BZ 6
UTE	0.94 G + 0.06 T
DIN	A31
CIE	41 69 88 94 100